



Bickers
Your glueing expert

Bickers-JMP **GLUEJET® XY-Glue Table**

Automatic Adhesive application

Bickers GmbH GLUEJET
Leopoldstr. 15, D-45139 Essen
Tel.: +49 (0)201-272553, Fax: 274912
www.bickers.de, info@bickers.de

GLUEJET® XY-Glue Table

Advantages of automatic adhesive

- ✓ Cost reduction by:
 - ✓ Significantly higher productivity
 - ✓ Reduced adhesive consumption
 - ✓ Effective workforce
 - ✓ Adhesive application can be combined hot / cold

- ✓ Increased product safety by:
 - ✓ Accurate and repeatable adhesive application
 - ✓ Special adhesives in hot and / or cold bonding technology
 - ✓ Resilient and flexible adhesive joints

- ✓ Future-proof through:
 - ✓ Universal applications + remote access via modem as standard
 - ✓ Used in the foam and foil area is possible by using different adhesives.

GLUEJET® XY-Glue Table

Benefits of GLUEJET® Adhesive table:

- ✓ Easy to learn logical machine operation
- ✓ Easy and quick machine set up via joystick operated laser point
- ✓ Orders / programmes can be saved by name & number
- ✓ Hot / cold adhesive separately or combined available
- ✓ Difficult geometries are possible
- ✓ Up to four independent jobs and orders can be processed simultaneously
- ✓ Open machine design allows maximum flexibility


GLUEJET® XY-Glue Table

Four different designs:



GLUEJET® XY-Glue Table

Combination glueing of hot melt spray and cold PVA lines. The hot melt holds the materials together while the cold glue dries giving a very strong bond. The spray saves on hot melt and the PVA absorbs into both surfaces.

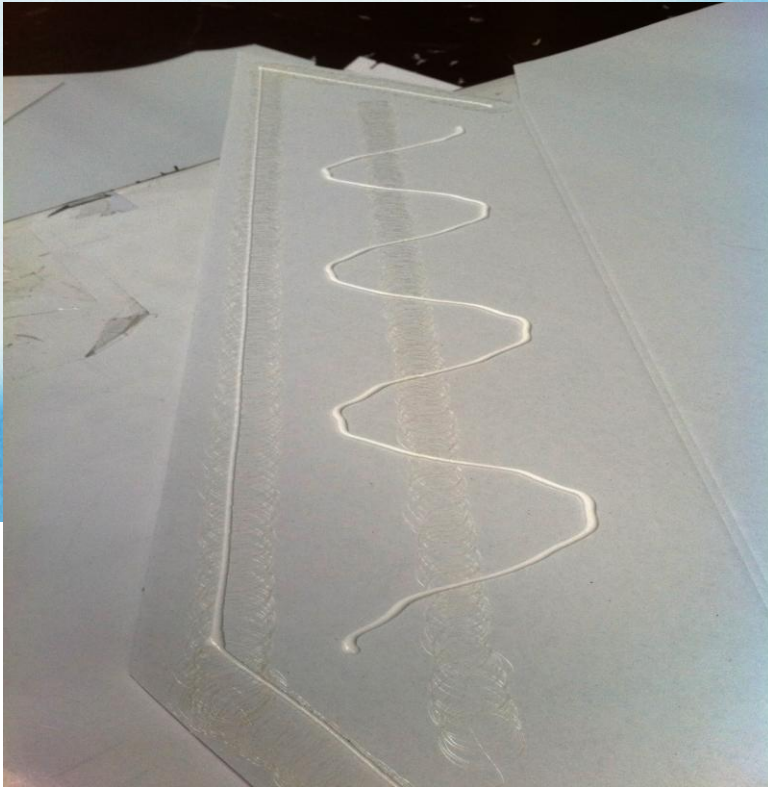

Applied Glue



30minutes later

GLUEJET® XY-Glue Table

A small selection of glue patterns



GLUEJET® XY-Glue Table

Pre-loading system for the Gluejet PA



GLUEJET® XY-Glue Table

Time and productivity:

- According to our customers the increase in productivity is at least doubled when compared with manual hand gluing.
- As the hot melt is pressure sensitive it allows large areas of glue to be applied in one pass whilst remaining open.
- The glue application cycle can be set on a dwell timer, this allows hourly rates to be repeated by the operators.

For further information contact Neil Thayer at:

FINISHLINE Machinery

UK Sales Agent / Mobile: 07881 788552

info@finishlineuk.com

www.finishlineuk.com